



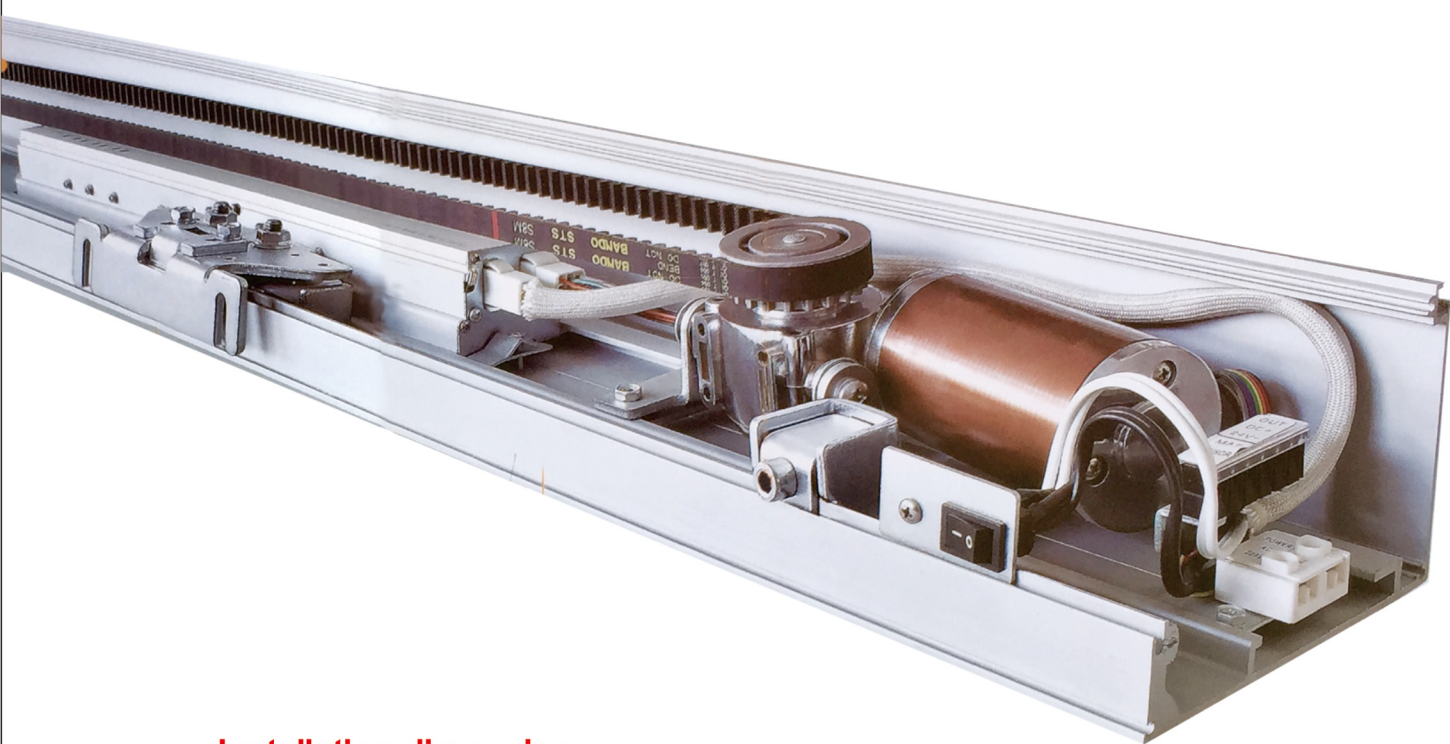

Installation dimensions

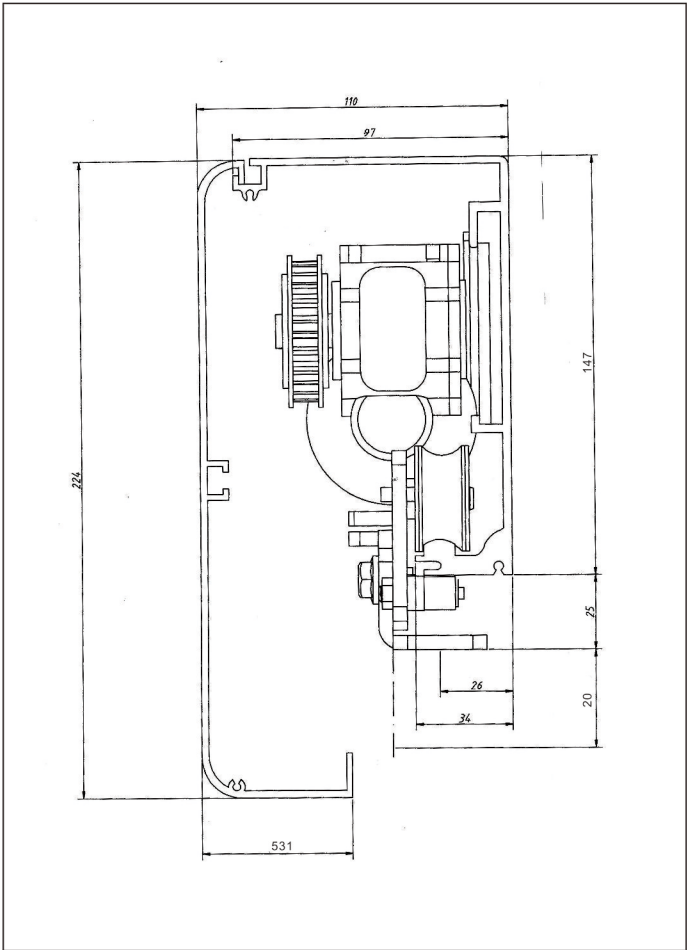

Technical Parameters

Sliding	Sliding gate	Double gate
Weight of gate	150kg following	150kg following × 2
Width	700-1300mm	600-1800mm
Master Controller	8 digital microprocessor	
Brushless motor	DC 24V 55W Brushless motor	
Opening Speed	15-50cm/s(adjustable)	15-45cm/s(adjustable)
Closing Speed	15-50cm/s(adjustable)	15-43cm/s(adjustable)
Hold open time	Within 0.5-8 seconds,adjustable	
Manual	Maximum 4.5kgf	
Power	AC200-250V 50/60Hz	
Temp	-30℃ ~ +50℃	
Function	→Sensor output signal →Speed up the door →Brake →Slow ←Canada closed Force ←Slow ←Brake ←Speed close ←Stop←	
Optional Parts	Safety light eyes, function switch,the reserve power supply,electric plug locks, two-door interlock and a variety of access control,etc.	