


Sliding Wall Systems has two standards types for fully glazed panels in SWS-DR and SWS-PF design, but also can be used in Wooden Door, Metal Door, Aluminium Frame Door and Fire Approved Door panel.....etc.

GCC®


SWS-DR

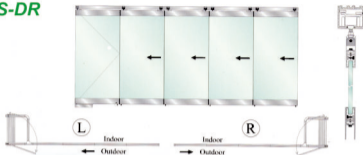

Panel types and functions

SWS-DR

- Fully glazed sliding walls with top & bottom rails.



- Non-sliding panel.

- Double action panel with **GCC** 9115 free pivot or GTS-650, or GTS-840 floor spring.

- DRL 5025 A/B lock when frontage closed.

- Sliding panel fixed with a flush bolt (DFB-101S / DFB-102S) When frontage closed.

- Sliding panel fix with a flush bolt (DFB-101ST / DFB-102ST) When frontage closed.

- Sliding panel fixed with a flush bolt (DFB-101S / DFB-102S). When frontage closed.

Max. Panel Height	4000mm	4000mm	4000mm	4000mm	4000mm
Max. Panel Width	1250mm	1250mm	1250mm	1250mm	1250mm
Max. Panel Weight	150 kgs	150 kgs	150 kgs	150 kgs	150 kgs

Suitable For :

- Aluminium Frame Door Panel.
- Frameless Glass Door Panel.
- Fire Approved Door Panel.
- Steel Door Panel.
- Wooden Door Panel.

Applications :

- Automobile Showroom.
- Banquet Halls.
- Convention Centers.
- Retail and Mall Storefronts
- Restaurants and Eateries.

SWS-DR Accessories

For SWS-DR Type Swing & Sliding door panel

GCC



RH/DR-102 Roller Hanger

Fix in DR-102 door rail for sliding door panel.



SWS-80EST End Stopper

Fix in SWS-80ST for stopping sliding doors.



9147/DR Floor Socket

Fix in the floor for DFB flush bolts & door rail locks(DRL-502S/B)



9115 Free Pivot

SUS 304 Floor pivot bearing.



DRL-5025A Door Rail Lock

Fix in DR-101 door rail with a europrofile cylinder (#9125DR) for locking to the floor.



SWS-80LP Lower part

Fix in DR-101, DR-102 door rail with SWS-80TC for the swing door.



9125DR

Europrofile cylinder

For fixing to DRL-5025A & DRL-5025B Door Rail Lock.



SWS-80TC

Top Center Pivot

Fix in SWS-80ST sliding track with SWS-80LP in the door rail or with GT-20 top fitting for the swing door



SWS-80RT(L) 90°



SWS-80RT(R) 90°



SWS-80RL 90°



Clear PVC Seals



SWS-80ST Sliding Track

Standard length in stock 3 meters.



SQ 50 (25mm Brush)

SQ 50S (10mm Brush)

Weather Strip

Fix in DR-102 door rail. To keep dust out and aircondition inside.

Rubber Strip

Fix in DR-102 door rail. To keep dust out and aircondition inside.



RS-1050 (10mm Rubber)

RS-1550 (15mm Rubber)

RS-2050 (20mm Rubber)

RS-2550 (25mm Rubber)